





BerryAlloc Vinyl Planks

Wherever. Forever.



3	Driven by innovation
4	A new and revolutionary click system
8	360° locking system
11	A solid HIPS click base
3	Advantages
6	DreamClick Pro collection
6	Safer and healthier every day
7	Installation guidelines
9	Technical data

Accessories

Driven by innovation

At Beaulieu Flooring Solutions you find the finest flooring under one roof.

We are the European leader in wall-to-wall flooring, with an extensive product range, excellent value for money, continuous innovation as well as dedicated and flexible professional service.

Two divisions within Beaulieu Flooring solutions, BerryAlloc and Beauflor, both commercialise the 'Vinyl Planks' product range. Within **Vinyl Planks** - also known as LVT (Luxury Vinyl Tiles)- we offer everything from dryback, xxl planks, click vinyl planks to our DreamClick Pro collection with it's new and revolutionary click system. Discover our wide range of over a 100 beautiful wood and tile decors.

BerryAlloc also offers you wonderful laminate for residential and commercial use, wall panels for kitchens and bathrooms and a complete parquet flooring range each with accompanying accessories.

Thanks to our excellent quality, our innovative range and exceptional service, the BerryAlloc Group has grown into an international player and highly rated interior and decoration specialist for both residential and commercial projects.

Beauflor is one of the leading producers of cushion vinyl flooring and the only manufacturer in the world to offer products 5m wide. We use state-of-the-art technology and have invested heavily in the technical aspects of the process to improve product benefits, such as easy maintenance and greater sound absorption, as well as indoor air quality by developing an antibacterial top coat which ensures long-lasting antibacterial protection for your floor.

Beaulieu Flooring Solutions is about providing you with the best of the best in a greener and more sustainable way. This particular passion influences both our philosophy and our actions.

Find more information about us and the Vinyl Planks range on our websites:

www.beaulieuflooringsolutions.com www.beauflor.com www.berryalloc.com





It has never been so easy to install your dreamfloor! You can click the planks together in any direction thanks to the unique 4 sided locking system. DreamClick Pro combines beauty and durability, is low maintenance and a pleasure to walk on. It is both water-resistant and sound absorbent, and can be completely recycled!

The DreamClick Pro collection is suitable for any room in your home, it can even be installed in shops, hotels and offices.

Above all, it is a floor which you really can install in no time at all, a dream come true!

A dream come true

- 1. The top coating, made of polyurethane, is extremely resistant to knocks and wear, retains its shape, and is completely water-resistant. This means that DreamClick Procan also be installed in bathrooms, kitchens and toilets.
- 2. The wear layer is made of PVC with the printed PVC design film underneath.
- 3. A solid PVC backing serves as a mould in which the top coatings are placed and is also the connection to the click frame.
- 4. The unique HIPS (High Impact polystyrene) click frame with all-round click elements ensures quick and easy installing in all directions (360°).
- 5. The durable acoustic dampening bottom coating made of PVC, suppresses sounds and ensures that DreamClick Pro sounds like real wood.



4




360° locking system

DreamClick Pro is unbeatable for installing thanks to its unique identical interlocking profile on all 4 sides. The planks click together easily on each side of the plank, back, front, left or right.


Super fast installation

The identical 4 sided locking profile allows you to install your DreamClick Pro floor faster than traditional click systems. No need to walk back to the other side of the room to start the next row. Start the installation in either corner of the room and click your way to the other side. You can start the next row where you've finished the previous row.

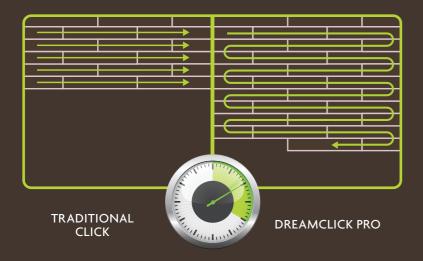


Working together on the same floor

DreamClick Pro offers you the opportunity to have several installers working simultaneously on the same floor. You can finish any room in no time at all!

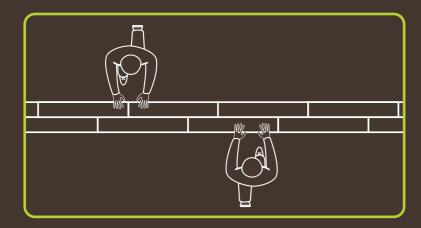


Versatile and creative

Installing DreamClick Pro is not only easier, but also more fun! Expand your creative thinking and install any floor pattern you can think of, you can even mix several colours to create a staggering effect.

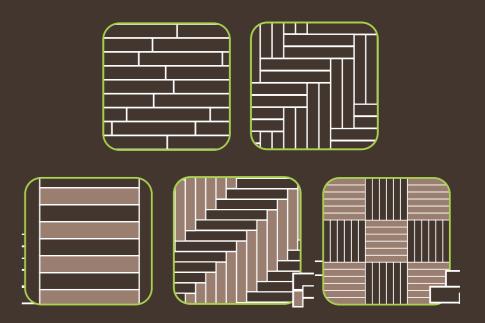

Click it your own way

You can install DreamClick Pro whichever way you want. Click the planks in by the long side and then connect the short side, or prefer doing it the other way around? Go Ahead! You can even choose whether to "push" or to "pull" the planks into place, it's so easy, anyone can do it!



First click short side



First click long side



Push



Pull


8



A solid HIPS click frame

Dimensionally stable

DreamClick Pro is unaffected by high moisture levels and is extremely stable at normal room tempera-tures. The HIPS click frame remains stronger and more rigid across a much wider temperature range than conventional PVC systems.

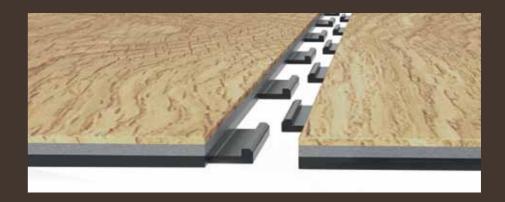

No subfloor preparation

Other smooth floors need a lot of preparation time to ensure a successful installation. With DreamClick Pro the subfloor requires little or no preparation: you can install DreamClick Pro on top of your existing hard flooring such as tiles or laminate. This means considerable time savings! The planks and the click system have a certain flexibility to make a perfect joint with no risk of the click edges breaking. A dream for renovation projects! Just let the boards acclimatize for two days and you're ready to go!

Reclickable, time and time again

Use the same DreamClick Pro floor time and time again thanks to the stronger and more rigid inter-locking tabs than click systems made of PVC alone. You can click and unclick the planks up to 30 times! A dream floor for exhibitions and temporary projects.



Advantages



Silent & soft floor

DreamClick Pro is a quiet floor, it absorbs noise and gives off a soft sound when walked on. DreamClick Pro also feels warm and makes you feel like walking on a real wooden floor.



Suitable for floor heating

DreamClick Pro has a low heat resistance, which makes it an ideal match with floor heating.



Water-resistant

DreamClick Pro is resistant to dampness or water spillages. No swelling, warping or rotting of the vinyl or HIPS frame. No lifting or curling on damp floors. (If your subfloor is not water-resistant, e.g. wooden beams, protect your subfloor with a membrane).



Lock strength

The stronger joints give a greater resistance to heavy traffic and rolling loads.



Easy maintenance

DreamClick Pro requires very little maintenance, just use a brush or vacuum cleaner or you can even clean your floor with a wet mop and standard cleaning products.



Environmentally friendly

Because it is made of virgin PVC material, our DreamClick Profloors are 100% recyclable.



Hygienic

All our floors are hygienic, thanks to the polyurethane top layer.






The better solution for commercial flooring.

DreamClick Pro combines extra high durability with a variety of designs to choose from, suited for both residential and commercial use. From fashionable shops, to hotel rooms, to the comfort of your own living room.

Thanks to its unique features, installing DreamClick Pro means considerable time savings, bringing down the total cost of installation:

- Superfast installation thanks to the revolutionary 360° locking system
- Little or no subfloor preparation and greater strength over subfloor irregularities thanks to the super solid HIPS click frame
- Reclickable, time and time again
- Withstands heavy traffic and reduces maintenance thanks to the heavy duty wear layer plus PU surface
- The stronger joints give a greater resistance to heavy traffic and rolling loads (500 kg/m)

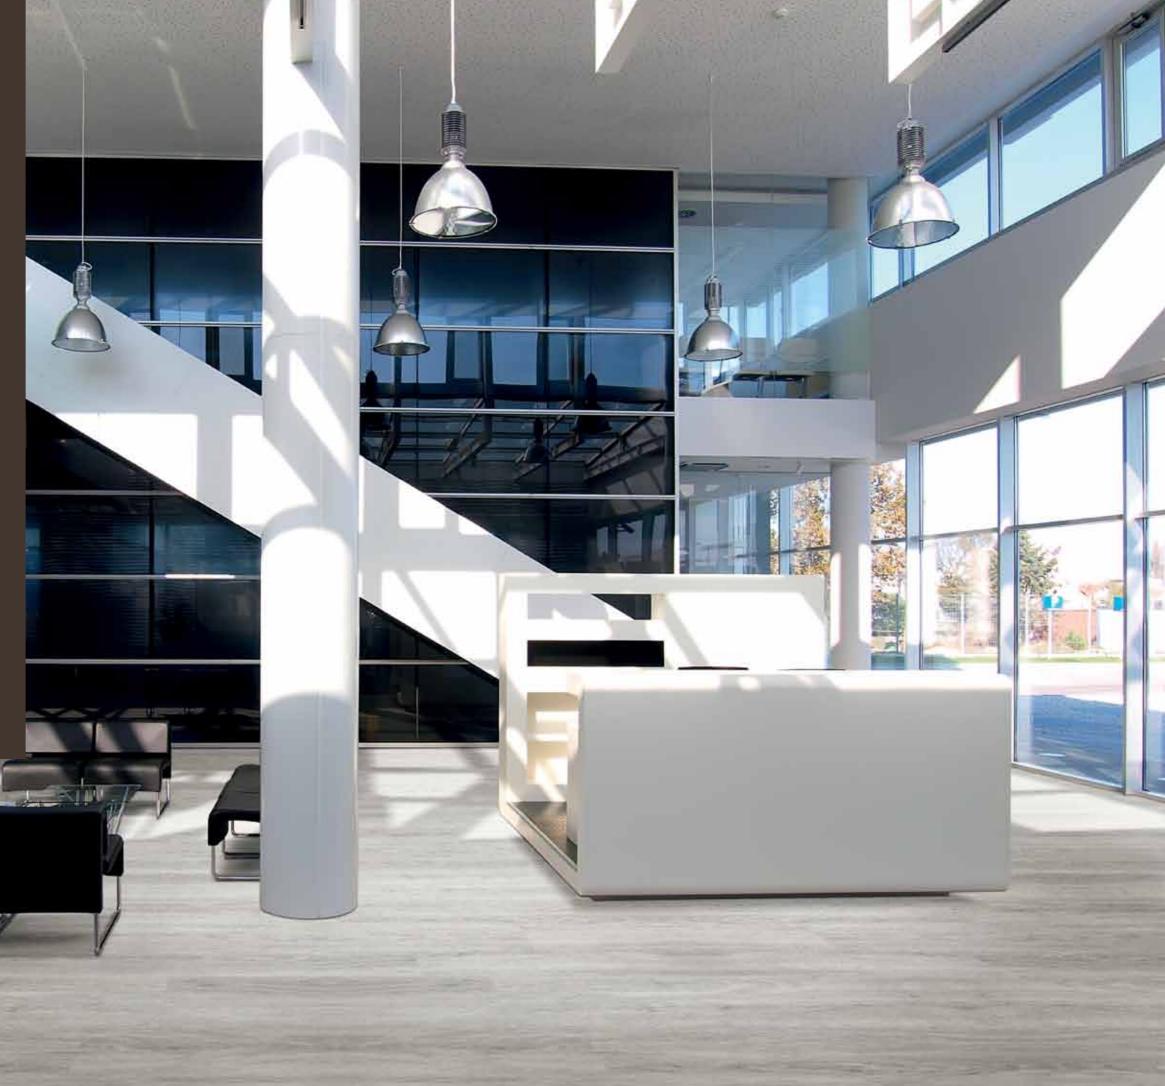













PUBLIC AND COMMERCIAL USE, AREAS WITH HEAVY TRAFFIC



GENERAL INDUSTRIAL USE



KING OF FOREST SADDLE 033

ART. 0065967



SCARLET OAK DARK BROWN 010



RIVER OAK DARK BROWN 030

ART. 0065966

ART. 0065964



VINTAGE OAK NATURAL 053

ART. 0065965

PACKAGING: BOX: 15 planks = 2,09 m² (16,43 kg) • PALLET: 63 boxes = 131,67 m² (1057 kg) • BOARD (mm) 914,4 L x 152,4 W x 5,3 TH



















RIVER OAK WHITE 021

ART. 0065973



EVERGREEN OAK SAND 008

ART. 0065970



RIVER OAK NATURAL 013

ART. 0065968





EVERGREEN OAK PEARL 007

ART. 0065972



RIVER OAK GREIGE 029

ART. 0065971



PALMER OAK NATURAL 014

ART. 0065969

PACKAGING: BOX: 15 planks = 2,09 m² (16,43 kg) • PALLET: 63 boxes = 131,67 m² (1057 kg) • BOARD (mm) 914,4 L x 152,4 W x 5,3 TH















PUBLIC AND COMMERCIAL USE, AREAS WITH HEAVY TRAFFIC



GENERAL INDUSTRIAL USE



EVERGREEN OAK PEARL 007

ART. 0065972



RIVER OAK WHITE 021

ART. 0065973



EVERGREEN OAK SAND 008

ART. 0065970



RIVER OAK NATURAL 013

ART. 0065968



PALMER OAK NATURAL 014

ART. 0065969



RIVER OAK GREIGE 029

ART. 0065971



KING OF FOREST SADDLE 033

ART. 0065967



SCARLET OAK DARK BROWN 010

ART. 0065964



RIVER OAK DARK BROWN 030

ART. 0065966



VINTAGE OAK NATURAL 053

ART. 0065965

Safer and healthier every day

DreamClick Pro has a reduced life-cycle impact on the natural environment which makes it the perfect floor for the world of tomorrow.

- Contains no harmful substances such as heavy metals
- Low VOC-emissions
- No DOP softening additives (lower carbon chain phthalates). These are replaced by environmentally friendly components in conformity with the toughest European regulations
- No components from the S.V.H.C. list December 2012 (Substances of Very High Concern)
- Fire-rating Bfl-s1. Self-extinguishing, allows for increased evacuation time in case of fire
- 100 % recycable





Installation guidelines

Before you start: let the planks acclimatize for 48 houres.

The subfloor

- The surface should be clean, dry, hard (e.g. no carpets) smooth with no sharp projections.
- DreamClick Pro will tolerate high moisture levels and mask minor cracks and small irregularities in the subfloor.
- Make sure the floor is free from chemical contamination, dust and loose debris.
- It is not necessary to remove existing hard floor coverings.
- Uneven floors will require the usual preparation with plyboard or a suitable smoothing compound.

Setting out

The planks are usually laid straight and parallel to the longer sides of the room with randomly staggered end joints - as this will result in the least amount of wastage.

Measure the room to accomodate a balanced layout. Determine if the width of the planks in the first row need to be cut. Cut off the click edges of the planks that are facing the wall.

Making the joints

- Join the planks by positioning and sliding them towards each other flat on the floor so that the connector tabs start to interlock.
- To complete the joint lift the outer edge of one plank upwards to approximately 20° and continue to gently push the planks together to achieve a perfectly tight joint, then lock the joint by lowering the plank back flat onto the floor.
- Don't use a hammer to put the planks together.

Expansion gaps

Allow an expansion gap of approx. 5 mm for thermal expansion.

Easy to cut

Use a stanley knife, jig-saw or guillotine

For more info on how to install DreamClick Pro, visit the website: www.dreamclick.be

1. 2. 3.







26 27





914,4 x 152,4 x 5,3 mm - 36" x 6" x 0.20" 15 planks/box = $2,09 \text{ m}^2$ (16,43 kg) = 22.49 sq ft (36.81 lb) 63 boxes/pallet = 131,67 m² (1057 kg) = 1,416.87 sq ft (2,354 lb)

Product specification

<u> </u>			
Total thickness	EN 428	5,30 mm / .20 inches	
Wear layer	EN 429	0,55 mm / 22 MIL	
Total weight	EN 430	8 kg/m² (.5lbs/ft²)	
Surface treatment		PUR	
Usage classification	EN 685	23 - 33 - 42	
Test results			
Underfloor heating	EN 12524	suitable - max. 27° (80°F)	
Castor chair	EN 425	pass	
Fire resistance	EN 13501-1	Bfl-s1	
Coefficient of Friction	ASTM C1028	0.77 Dry 0.69 Wet	
Durometer Hardness	ASTM D2240	97	
Static load limit	ASTM F970	pass (1,500 Lbs)	
Electrical resistance	ASTM F150	resistant	
Radiant Flux	ASTM 648	class 1 (0.54 watts/cm²)	
Dimensional stability	ASTM F 2199	pass	
Flexibility	ASTM F137	pass (6 mm)	
Impact resistance	ASTM F1265	pass	
Resistance to heat	ASTM F1514	pass	
Resistance to light	ASTM F1515	pass	
Size and squareness	ASTM F2055/F2421	pass	
Abrasion Resistance	ASTM D4060	60,000 cycles	
Chemical resistance	EN 423 / ASTM F925	OK / No Effect 24 hrs	
Residual indentation	EN 433 / ASTM F1914	< 0,10 mm / 0.009 (4%)	
Slip resistance	DIN 51130 EN 13983	R10 class DS	
Sound reduction	EN ISO 717-2 (∆ Lw)	8 dB	
Light fastness	ISO 105-B02	> 6	
Drum noise	EPLF	SL60	
Locking strength		500 kg/m - 340 lbs/lin ft	
Anti static	EN 1815	yes	
Residential warranty		Lifetime	
Commercial warranty		10 years	
Formaldehyde		El	











BerryAlloc Accessories

DreamClick Pro = 914,4x152,4x5,3mm = 15 boards = 2,09 m² 0065965 | 0065972 | 0065970 | 0065971 | 0065969 | 0065966 | 0065967 | 0065968 | 0065973 | 0065964 Vintage Oak Natural 053 River Oak Greige 029 Palmer Oak Natural 014 River Oak Dark King Of Forest Saddle 033 Evergreen Oak Pearl 007 **ACCESSORIES** SKIRTING 60 mm MDF Per 4 p. = 9,6 m 9320-3019 | 9320-3036 | 9320-3024 | 9320-3020 | 9320-3027 | 9320-3269 | 9320-3033 | 9320-3863 | 9320-8531 | 9320-3021 Per 4 p. = 9,6 m SKIRTING 70 mm WATERRESISTANT 9580-3019 | 9580-3036 | 9580-3024 | 9580-3020 | 9580-3027 | 9580-3269 | 9580-3033 | 9580-3863 | 9580-8531 | 9580-3021

		9300-0008	
CLIPS - MDF SKIRTING	Order quantity		
SKIRTING CLIPS AND PLUGS	Sold per bag (30 clips/bag)	9310-0017	

UNDERLAYS

ALUMINIUM PROFILES	Order quantity	Silver	Champ.	Bronze
REDUCER 2 m 4-7,5 x 33 x 2000 mm	Per piece	9422-3017	9422-3016	9422-3018
T-PROFILE 2 m 4-7,5 x 24 x 2000 mm	Per piece	9412-3017	9412-3016	9412-3018
END PROFILE 2 m	Per piece	9431-3017	9431-3016	9431-3018

BerryAlloc Accessories

The perfect finish for a dream floor

Because the correct, meticulously chosen finish makes all the difference in the world, we are not satisfied with a half-finished job. That is why BerryAlloc has a comprehensive range of skirtings that is ready for you to use.

60 mm MDF skirting



H 60 x W 14 x L 2400 mm Sold per 4 pieces





H 4-7,5 x W 24 x L 2000 mm Sold per piece

Clips for MDF skirtings



30 clips per bag Sold per bag

Reducer Profile Silver Aluminium *



H 4-7,5 x W 33 x L 2000 mm Sold per piece

70 mm skirting water resistant




H 70 x W 12 x L 2400 mm Sold per 4 pieces

End Profile Silver Aluminium *



H 4-7,5 x W 20 x L 2000 mm Sold per piece

DreamTec



With DreamClick Pro an underlay is not necessary, we do however recommend DreamTec to improve the impact sound levels and to install over porous and non-water resistant subfloors.

- Improve the impact sound levels (-18dB)
- Vapour barrier included in underlay
- Install over porous subfloors
- Very high compressive strength
- Available in rolls of 10 m²

* Also available in champagne and bronze colours.









UTOPIA LIVING SINGAPORE PTE LTI 200 Turf Club Road #07-09/10/11 Singapore 287994

Enquiry@utopialiving.biz www.utopialiving.biz

